

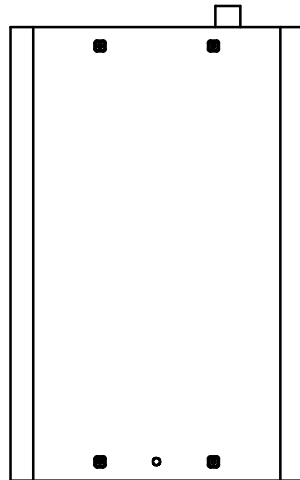


OUTLET AIR



INLET AIR

Dimensions	395mm x 600mm x 565mm (h)	15.55in x 23.62in x 22.24in (h)
Weight	39 kg	86 lb
Voltage-Frequency	230V - 50Hz	115V - 60Hz
Current Consumption	5,2 A	10,4 A
Compressor Power	1 HP	
Power Consumption (Cooling)	900 W	3070 Btu/h
Power Consumption (Heating)	1200 W	4095 Btu/h
Cooling Capacity *	2800 W	9555 Btu/h
Minimum Water Flow	3000 l/h	795 Usgal/h
Air Flow	450 m³/h	15900 CFH
Maximum Exchanger's Pressure	1 bar	14,5 PSI
Ambient Temperature Range	5°C - 38°C	32°F - 100°F
Certification	CE	
Protection Grade	IPX4	
* the value reported refers to the following condition: room temperature 30°C (86°F), water temperature 25°C (77°F)		

"H" model: - 2 x Heater kit - 1 x UV-C kit	Material:	Drawing: TK6000/6000H – technical data	
	Thickness:	File: TK6000_6000H_technical_drawing	
Volume:	Finishing:	Your code:	Code:
	Approved:	Tol.	Scale: 1:10
	Via A.Sansovino, 35 48124 RAVENNA – ITALY Tel. +39 0544 408333 Fax 280084 http://www.tecoonline.com		Date: 31/10/2014
	Drawer: Matteo		

AS BY LAW ENACTED WE RESERVE US THE PROPERTY OF THIS DOCUMENT WITH THE PROHIBITION OF REPRODUCE IT, SAVE IT INTO ACHIVES SYSTEM, GIVE IT OR HOWEVER LENT IT TO THIRD PARTY WITHOUT OUR AUTHORIZATION. EVERY VIOLATION INVOLVES THE COMPENSATION FOR THE UNDERGONE DAMAGES.WE MAKE RESERVATIONS ABOUT ALL THE RIGHTS DERIVING FROM PATENTS OR MODELS.

Modify:

Drawer: